

AMERICAN WALNUT

Top layer approx. 3,6 mm

Maintenance oil natural



FLOOR S



Admonter FLOORs on underfloor heating systems

Admonter FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Admonter FLOORs on underfloor heating systems!


Admonter accessories

The wide range of accessories matches the Admonter FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit www.admonter.eu/en/downloads/.

PLEASE NOTE: natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! Repair and supplementary oils you can find in our Admonter product list. Further information about our products can be found at admonter.at

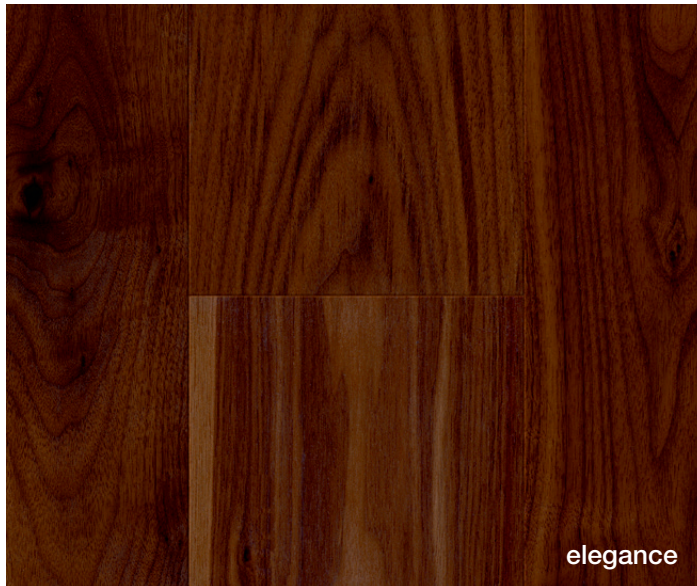

Grading	Thickness (mm)	Construction	Width (mm)		Length (mm)	Texture	Finish		Profile
elegance	10	2-Schicht	120	small	1200	sanded	ng	ml	Tongue & groove
	13	3-layer	120	small	1200	sanded	ng	ml	lock-it
	15	3-layer	158	classic	1850 / 2000	sanded	ng	ml	Tongue & groove
						sanded	ng	ml	lock-it
rustic	15	3-layer	158	classic	1850 / 2000	sanded	ng	ml	Tongue & groove
					2000	antico	pc		Tongue & groove
					1850 / 2000	sanded	ng	ml	lock-it
			192	classic	1850 / 2000	sanded	ng	ml	Tongue & groove
					2000	antico	pc		Tongue & groove

Backing: Solid wood / ng: natural oiled easy care / pc: natural oiled pro care / ml: matt lacquer

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.eu/en/downloads/>

Type of wood	Thickness (mm)	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m ² K/W]	Hardness[N/mm ²]	Fire classification
American Walnut	10	5,6	7+/-2	0,16	0,063	36	C _g -s1
American Walnut small	13	6,8	7+/-2	0,15	0,087	36	C _g -s1
American Walnut LH-RS	15	8,3	7+/-2	0,17	0,088	36	C _g -s1
American Walnut NH-RS	15	7,6	7+/-2	0,16	0,094	36	C _g -s1

LH-RS: Hardwood-Backing / NH-RS: Softwood-Backing

