

SPRUCE AB

AB: Mostly sound knots, occasional small filled knots and small filled knotholes, no colour defects, occasional pith ray possible, no shakes, small resin pockets possible, slight compression wood and slight colour variations might occur, jointfree gluing.

Bottom layer standard: closed jointing, no blue-stain.

Bottom layer AB: as above. This panel is also available with a gluing adapted to wet areas (sauna) and is therefore in accordance with the emission requirements according to ONORM M6219-1:2010 for the use in sauna areas (see information "Admonter Element's in sauna areas" at <http://www.admonter.eu/en/downloads/>).



ELEMENTS

The above picture shows an example of the natural character of the wood, this will vary in every panel. Variations in colour and grain patterns are natural and inevitable. A picture is never a substitute for the "real thing". For this reason we recommend a visit to your nearest Admonter dealer. He will be pleased to show you samples.

Grading	Thickness mm app.	Length mm (Width 2030 mm)	Top layer thickness mm	Top layer width mm	Middle layer	Packaging pack./palett
AB/ST	12	5000	3,6	114/137/146	BML Spruce	25
AB/ST	15	5000	3,6	114/137/146	SML Spruce	35
AB/AB	19	5000	6	114/137/146	BML Spruce	30
AB/ST	19	5000	6	114/137/146	BML Spruce	30
AB/ST suitable for sauna use	19	5000	6	114/137/146	BML Spruce	30
AB/ST	22	5000	6	114/137/146	BML Spruce	25
AB/ST	24	5000	6	114/137/146	SML Spruce	25
AB/AB	27	5000	9	114/137/146	BML Spruce	20
AB/ST	27	5000	9	114/137/146	BML Spruce	20
AB/ST	42	5000	6	114/137/146	SML Spruce	10

Panels are glued SWP/2 NS (non structural): solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas).

Legend: SML = strip core, BML = board middle layer.

More information concerning fire classification in the accompanying information to CE-marking.

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.eu/en/downloads>

Type of wood	Thickness (mm)	Middle layer	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]
Spruce	12	Spruce	5,6	8+/-2	0,12
	15	Spruce	7,1	8+/-2	0,12
	19	Spruce	8,9	8+/-2	0,12
	22	Spruce	10,3	8+/-2	0,12
	24	Spruce	11,3	8+/-2	0,12
	27	Spruce	12,7	8+/-2	0,12
	42	Spruce	19,7	8+/-2	0,12



You can find more detailed information at: admonter.at



CHARACTERISTICS BILDER SPRUCE AB

ELEMENTS

The above picture shows an example of the natural character of the wood, this will vary in every panel. Variations in colour and grain patterns are natural and inevitable. A picture is never a substitute for the "real thing". For this reason we recommend a visit to your nearest Admonter dealer. He will be pleased to show you samples.

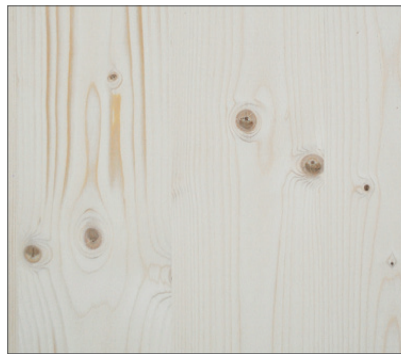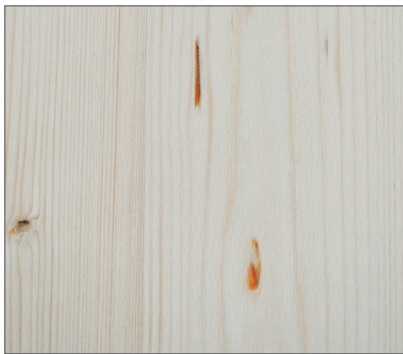

The photos show the range of possible colours.



You can find more detailed information at: admonter.at