

FIR RIFT/SEMIRIFT

A: slight natural colour variation possible, calm and reduced appearance of rift/quarter cut, contrasting colour variation are a valued feature (greyish/blueish/redish). Sound knots and dead knots possible, bark pockets and small cracks as well as cracked knots partially allowed, knotholes professionally filled. Joint free gluing.

Backing C+: fir, knotholes and shakes professionally filled, twin layers not laid next to each other, no special quality specifications, finger-jointed allowed.



The above picture shows an example of the natural character of the wood, this will vary in every panel.

Grading	Thickness mm app.	Length mm (Width 2030 mm)	Top layer thickness mm	Top layer width mm	Middle layer	Packaging pcs./pallet
A/C+	19	4000 (subject to availability 3500)	5		SML/BML Spruce	30

Panels are glued SWP/2 NS (non structural): solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas).

Legend: SML = strip core, BML = board middle layer.

More information concerning fire classification in the accompanying information to CE-marking.



You can find more detailed information at: admonter.at


The above picture shows an example of the natural character of the wood, this will vary in every panel. Variations in colour and grain patterns are natural and inevitable. A picture is never a substitute for the "real thing". For this reason we recommend a visit to your nearest Admonter dealer. He will be pleased to show you samples.

ELEMENTS

DETAILED PICTURES FIR

ELEMENTS

The above picture shows an example of the natural character of the wood, this will vary in every panel. Variations in colour and grain patterns are natural and inevitable. A picture is never a substitute for the "real thing". For this reason we recommend a visit to your nearest Admonter dealer. He will be pleased to show you samples.

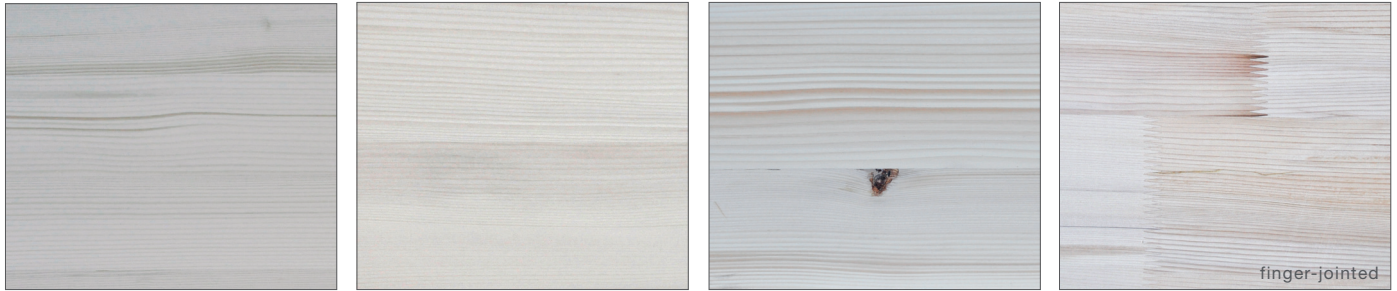

finger-jointed



Backing



Backing finger-jointed

The above picture shows an example of the natural character of the wood, this will vary in every panel. The backing can consist of both continuous and finger-jointed slats.



You can find more detailed information at: admonter.at