


STONE PINE

ZI: Mostly sound knots, small black knots possible, knotholes are professionally filled, occasional sapwood, occasional resin pockets and pith ray possible, contrasting colour variations possible, lamellas are jointfree placed.

Bottom layer C+: Stone-pine, no special quality specifications, filled surface.

This panel is also available with a gluing adapted to wet areas (sauna) and is therefore in accordance with the emission requirements according to ONORM M6219-1:2010 for the use in sauna areas (see information "Admonter Element's in sauna areas" at http://www.admonter.eu/en/downloads/).

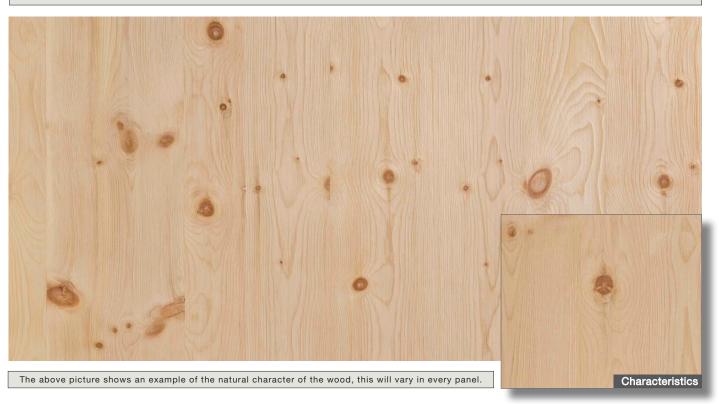

Grading	Thickness mm app.	Length mm (Width 2030 mm)	Top layer thickness mm	Top layer width mm	Middle layer	Packaging pack./palett
ZI/C+	19	2100-4500 (subject to availability)	3,4	Mix	SML Spruce	30
ZI/C+ (suitable for sauna use)	19	2100-4500 (subject to availability)	3,4	Mix	SML Spruce	30
ZI/ZI	40	2400	3,4	Mix	Spruce 5-Layer	10

Panels are glued SWP/2 NS (non structural): solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas).

Legend: SML = strip core, BML = board middle layer.

More information concerning fire classification in the accompanying information to CE-marking.

Technical information More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.eu/en/downloads									
Type of wood	Thickness (mm)	Middle layer	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]				
Stone Pine	19	Spruce	8,5	8+/-2	0,12				
	40	Spruce	18,3	8+/-2	0,12				













You can find more detailed information at: admonter.at