

OAK

Top layer approx. 3,6 mm

Maintenance oil natural



Admonter FLOORs on underfloor heating systems

Admonter FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Admonter FLOORs on underfloor heating systems!

Admonter accessories

The wide range of accessories matches the Admonter FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit www.admonter.eu/en/downloads/.

PLEASE NOTE: natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! Repair and supplementary oils you can find in our Admonter price list. Further information about our products can be found at admonter.at



FLOORs

Grading	Thickness (mm)	Construction	Width (mm)		Length (mm)	Texture	Finish		Profile	
noblesse	10	2-layer	120	small	1200	sanded / brushed	ng	ml	Tongue & groove	
			158/180	classic	2000	sanded / brushed	ng	ml	lock-it	
	13	3-layer	120	small	1200	sanded / brushed	ng	ml	lock-it	
			158/192	classic	1850 / 2000 / 2400	sanded / brushed	ng	ml	Tongue & groove	
elegance	10	2-layer	158	classic	2000	sanded / brushed	ng	ml	lock-it	
			158/192	classic	1850 / 2000 / 2400	sanded / brushed	ng	ml	Tongue & groove	
	15	3-layer	158/192	classic	1850 / 2000 / 2400	sanded / brushed	ng	ml	lock-it	
			240	classic	2000 / 2400	sanded / brushed	ng	ml	Tongue & groove	
basic	10	2-layer	120	small	1200	sanded / brushed	ng	ml	Tongue & groove	
			158/180	classic	2000	sanded / brushed	ng	ml	lock-it	
	13	3-layer	120	small	1200	sanded / brushed	ng	ml	lock-it	
			158	classic	1850 / 2000 / 2400	sanded / brushed	ng	ml	Tongue & groove/lock-it	
	15	3-layer	158	classic	1850 / 2000 / 2400	scraped	ng		Tongue & groove	
						antico	pc		Tongue & groove	
			192	classic	1850 / 2000 / 2400	sanded / brushed	ng	ml	Tongue & groove/ lock-it	
						scraped	ng		Tongue & groove/ lock-it	
			240	classic	2000 / 2400	sanded / brushed	ng	ml	Tongue & groove	
						scraped	ng		Tongue & groove	
	naturelle	10	2-layer	158/180	classic	2000	sanded / brushed	ng	ml	lock-it
				158/192	classic	1850 / 2000 / 2400	sanded / brushed	ng	ml	Tongue & groove
15		3-layer	280	long	2800	sanded / brushed	ng	ml	lock-it	
						scraped	ng		Tongue & groove	
			120	small	1200	sanded / brushed	ng		Tongue & groove	
						sanded / brushed	ng		lock-it	
rustic	10	2-layer	120	small	1200	sanded / brushed	ng		Tongue & groove	
			158/180	classic	2000	sanded / brushed	ng		lock-it	
	15	3-layer	158/192	classic	1850 / 2000 / 2400	sanded / brushed	ng		Tongue & groove	
						scraped	ng		Tongue & groove	
			2000	classic	1850 / 2000 / 2400	antico	pc		Tongue & groove	
						sanded / brushed	ng		lock-it	
			192	classic	2000	scraped	ng		lock-it	
						autentico	pc		Tongue & groove	
			240	classic	2000 / 2400	sanded / brushed	ng		Tongue & groove	
						scraped	ng		Tongue & groove	

Backing: Solid wood / ng: natural oiled easy care / pc: natural oiled pro care / ml: matt lacquer

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.eu/en/downloads/>


Type of wood	Thickness (mm)	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]	D-Value R [m ² K/W]	Hardness [N/mm ²]	Fire classification
Oak	10	5,7	7+/-2	0,15	0,067	41	C _s -s1
Oak small	13	7	7+/-2	0,14	0,094	41	C _s -s1
Oak LH-RS	15	8,6	7+/-2	0,15	0,100	41	C _s -s1
Oak NH-RS	15	7,8	7+/-2	0,14	0,107	41	C _s -s1

LH-RS: Hardwood-Backing / NH-RS: Softwood-Backing




AUTENTICO



OAK

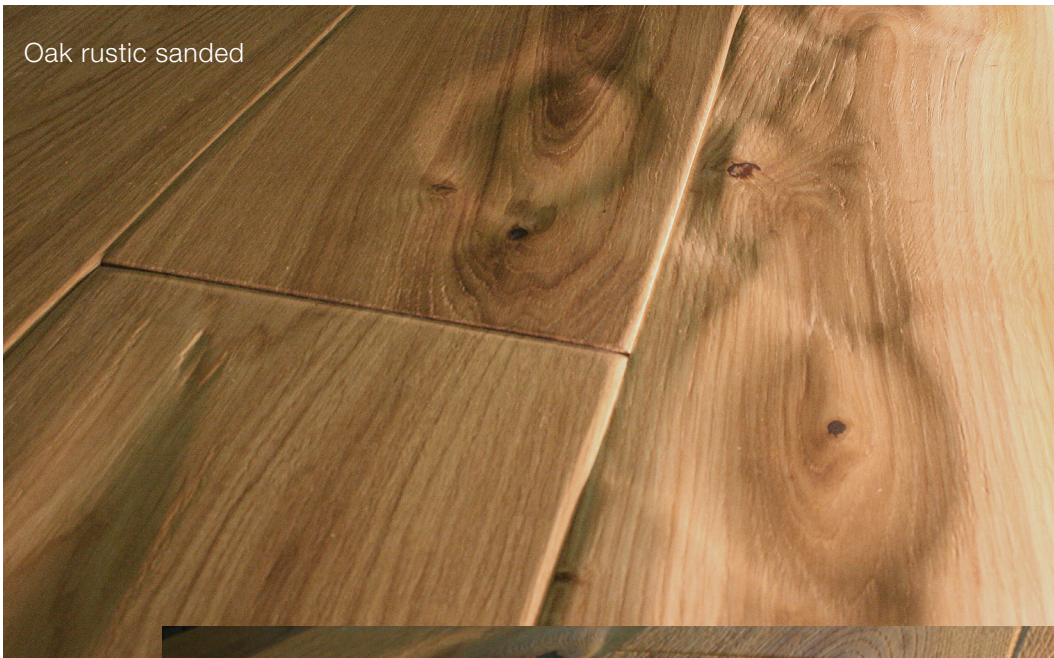

Oak rustic sanded

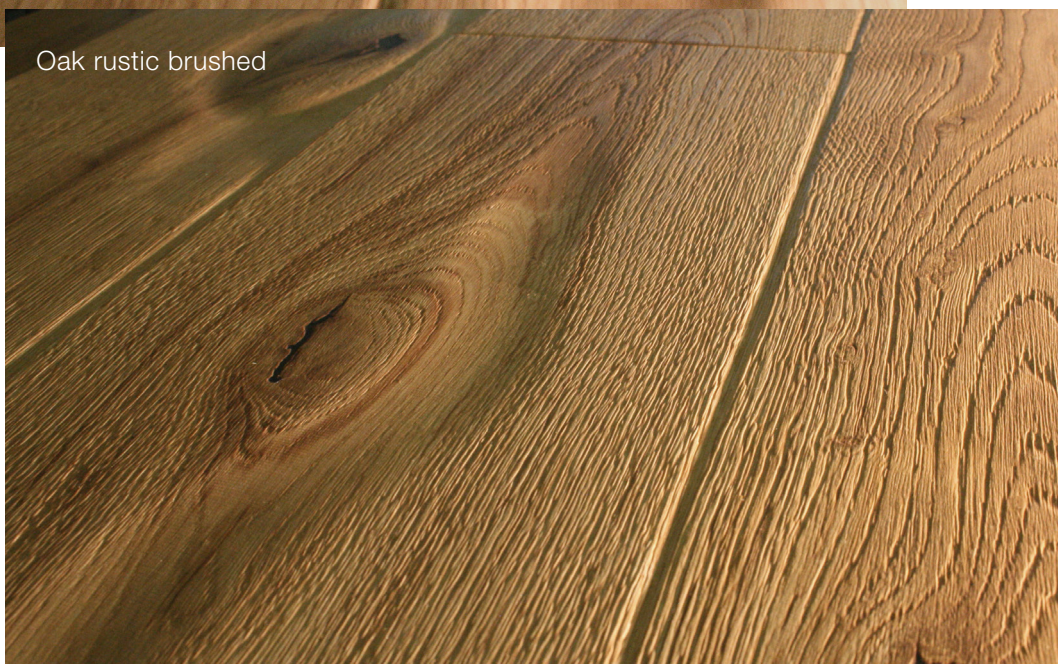

Oak rustic brushed

		OAK AUTENTICO				<i>Top layer approx. 3,6 mm</i> <i>Initial oil treatment required!</i> <i>Maintenance oil natural</i>		
Grading	Thickn. (mm)	Construction	Width (mm)	Length (mm)	Texture	Profile		
rustic	15	3-Layer	192	classic 2000	sanded / brushed	pc	Tongue & groove	

