




Wooden floors
Floors

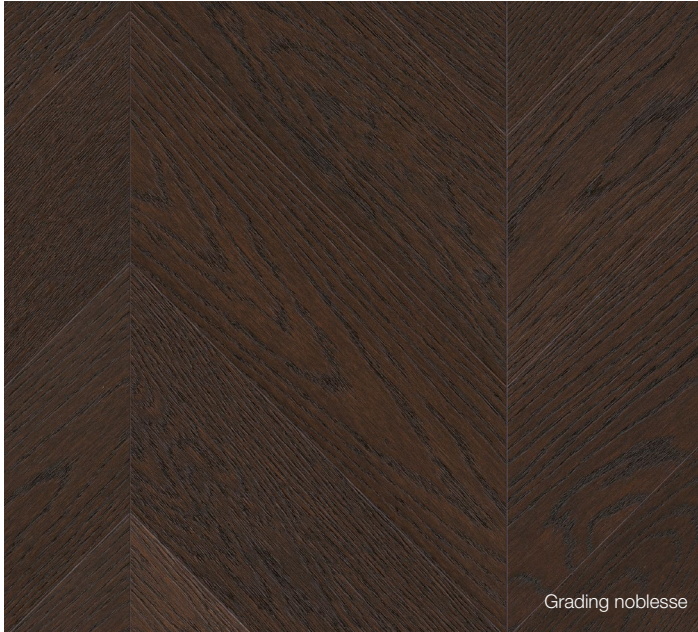

Admonter FLOORs on underfloor heating systems

Admonter Floors are ideally suited for use on underfloor heating systems. In principle, warm water low-temperature underfloor heating is recommended. The floor must be glued down over the entire surface, we recommend Admonter Elastic. Please note the [detailed information](#).

Admonter room concepts

Our floors, walls, ceilings, stairs, doors or even acoustic solutions are perfectly coordinated to turn your ideas into reality and give every room a very special atmosphere.

Regular care and maintenance

Please see the [Admonter maintenance & installation instructions](#).

Finish



Easy care: This surface has a high process reliability and colour consistency and is highly resistant to mechanical stress. In order to achieve optimum bevel wetting, INITIAL OIL TREATMENT is absolutely necessary for this product.

The appropriate Admonter Maintenance oil for the initial oil treatment is automatically included in the delivery as a separate invoice item. Repair and supplementary oils are available on request.

Grading	Thickn. (mm)	Construction	Item No.		Width (mm)	Format	Length (mm)	Texture	m ² / Pack.	Finish	Profile	
			left	right								
noblesse	45°	15	3-layer	118923	118901	120	small	500	brushed	0,84	ec	Tongue & groove
basic	45°	15	3-layer	119299	119298	120	small	500	brushed	0,84	ec	Tongue & groove

Note:
only right or left rods per pack

ec: natural oiled easy care

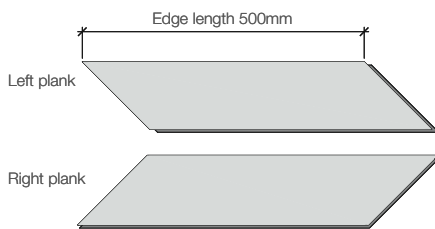


PATTERN WIDTHS
FORMAT 45°
15 x 120 x 500 mm

B - approx. 707 mm

A (Calculated) - 169,7 mm


IDEAS FOR INSTALLATION PATTERNS

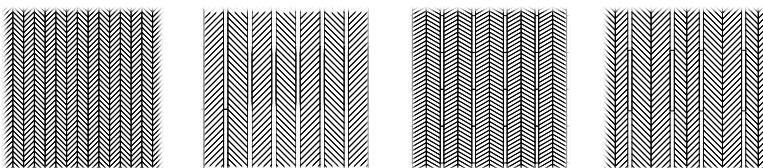

Admonter flooring is a 100 % natural product. A picture never replaces the reality. For this reason we recommend a visit to your nearest Admonter flooring dealer. He will be pleased to show you samples. Errors and changes possible.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | info@admonter.at
FN237499p Landesgericht Leoben, Gerichtsstand Liezen | UID-Nr.: ATU57198366

Raiffeisenbank Admont, IBAN: AT88 3800 1000 0002 7276 | BIC: RZSTAT213001 | admonter.com

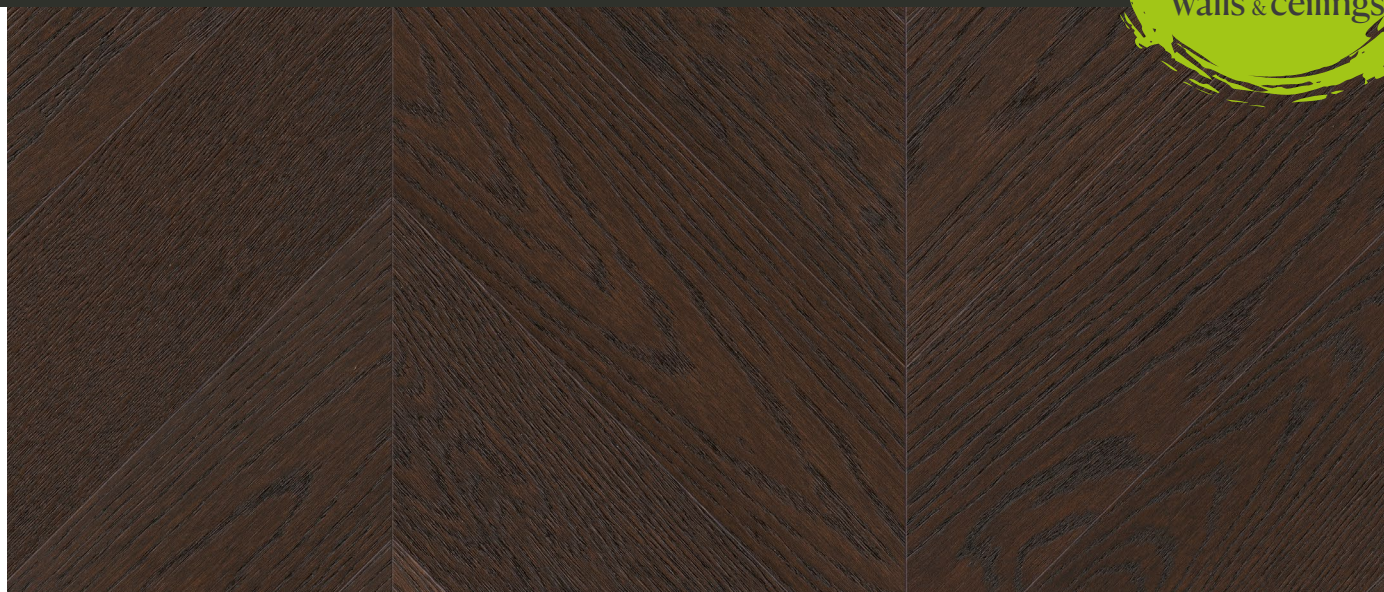

Thermo-treated products:

With its heat-treated thermo-treated products, Admonter provides a positive response. To create these elegant, dark natural floors, European woods are darkened in a natural way – and this is done completely without pollutants and toxins using the proven heat-treatment process. This process allows the creation of various shades and nuances of colour. This enables us to create a large colour spectrum of dark woods in an environment-friendly way.

Natural colour changes:

As every Admonter is an absolutely natural product, natural colour changes occur over time. UV light (a component of natural sunlight) causes light woods to become darker and dark woods to become lighter, whereby this effect is most noticeable in the first 3-6 months.

Feature Wooden Floors	Benefit
Choice of countless wood species, in particular reclaimed wood	Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer Different structure possibilities and colour shades or area of application.
Different structure possibilities and colour shades	
Individual colours (Easy-Color)	The right surface for every customer or area of application / living situation
Different surfaces (natural oiled easy-care, natural-oiled pro-care, matt living situation lacquered) – advantages EC	
Different construction variants, thicknesses and profiles / installation systems	The right product for every application / purpose
Different formats (SMALL, CLASSIC, LONG, XXLlong)	The right product for every room size and situation
Different widths that can be laid together	Great appearance of the floor in large rooms
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction) For wood type oak 240mm width = hardwood reverse side	Rigid against torsion -> the floor lies flatter and the position of joints is reduced, even with wide plank flooring

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads/>

Type of wood	Thickn. (mm)	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m ² K/W]	Hardness [N/mm ²]	Fire classification
Oak	15	8,6	7+/-2	0,15	0,100	41	C _s -s1



Admonter flooring is a 100 % natural product. A picture never replaces the reality. For this reason we recommend a visit to your nearest Admonter flooring dealer. He will be pleased to show you samples. Errors and changes possible.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | info@admonter.at
FN237499p Landesgericht Leoben, Gerichtsstand Liezen | UID-Nr.: ATU57198366

Raiffeisenbank Admont, IBAN: AT88 3800 1000 0002 7276 | BIC: RZSTAT213001 | admonter.com