
Reclaimed wood Alder grey



AHE: Reclaimed wood panel from naturally weather-beaten alder with a surface full of character and colour variation; sound knots, black knots, knot holes and spike knots possible; pith ray, resin pockets, worm holes, shakes, nail holes, bark pockets and mechanical dama-ges possible; colour variation caused by natural weathering of the wood and top layer joints are a valued feature. Top layers are joint free placed but not joint less glued. Panels not cut to size.

Bottom layer C: Hardwood, no special quality specification, not filled.

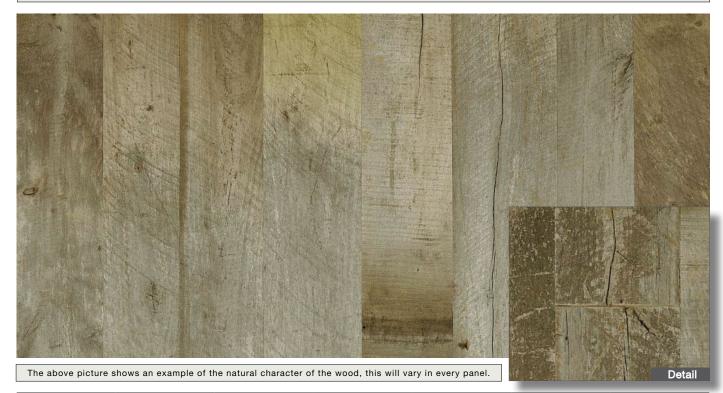

Grading	Thickness mm app.	Length mm (Width 2030 mm)	Top layer thickness mm app.	Top layer width mm	Middle layer	Packaging Pcs./palett
AHE/C	21	1800 / 2100 / 2250	7-10	Mix	BML or SML- Spruce (subject to availability)	25

Panels are glued SWP/2 NS (non structural): solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas).

Legend: SML = strip core, BML = board middle layer.

More information concerning fire classification in the accompanying information to CE-marking.

Technical information More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.eu/en/downloads						
Type of wood	Thickness (mm)	Middle layer	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	
Recl. wood alder grey	21	Spruce	10,5	7+/-2	0,13	



















Features wooden panels Elements	Benefit		
Standard width 2030 mm for ALL ELEMENTs	Simple stock-keeping (no short lengths: e.g. reclaimed wood) Calculation of offcuts / less articles by product group -> more comprehensive		
Choice of countless wood species – in particular reclaimed wood	Wide range of options for customized products, tailored to custome		
Different texture options and colours	benefits / requirements. The right surface for every customer and area of application / living situation.		
Also available for sauna use	area or application? IIVING Situation.		
A wide range of construction variants	The right product for every application.		
Service programme – cutting to size and simple edge processing and milling work, as well as surface treatment and application of different textures	Capacity balancing in the event of overload of the processor's production / possibility to buy ready-to-assemble furniture parts		













